



Report No. SCL01I106198 Page 1 of 25

CENTRE TESTING INTERNATIONAL



Applicant Guangzhou Zhiyuan Electronics Stock Co.,LTD

Address 2 Floor, NO.7 Building, Huangzhou Industrial Estate, Chebei

Road, Tianhe, Guangzhou, Guangdong China

Product Name MiniPCIeCAN interface Board

Product Part No. MiniPCIeCAN-II
Client Reference MiniPCIeCAN-2E-U

Information

Conclusion

Tested SampleAccording to directiveResultSubmitted Sample2011/65/EUPass

Pass means that the results shown on the report comply with the limits set by RoHS Directive 2011/65/EU.

Tested b

bv

Gren Lin

Reviewed by

Inseles of

INTERNATION

Danny Liu Technical Manager Date

Jan. 4, 2017

No.R177739394

Centre Teapog International Group Co.,Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China



Report No. SCL	01I106198			P
	R	eport Cor	itent	
Sample Infor	mation	(4)		
Test Request	ed			······································
Photo(s) of the	ne Product(s)			
Test Method	<u>@</u>	·····		
)			
	T. 1.1.C			
	he Tested Comp			
Rons Direct	ive Exemptions			



Report No. SCL01I106198 Page 3 of 25

Sample Received Date Nov. 23, 2016

Testing Period Nov. 23, 2016 to Jan. 4, 2017

Test Requested 1. As specified by client, to screen Lead(Pb), Cadmium(Cd), Mercury(Hg),

Chromium(Cr) and Bromine(Br) in the submitted sample(s) by XRF.

2.As specified by client, when screening results exceed the XRF screening limit in IEC 62321-3-1:2013 Ed.1.0, further use of chemical methods are required to test the Lead(Pb), Cadmium(Cd), Mercury(Hg), Hexavalent Chromium(Cr(VI)), Polybrominated Biphenyls(PBBs), Polybrominated Diphenyl Ethers(PBDEs) in

the submitted samples.

Photo(s) of the Product(s)







Report No. SCL01I106198 Page 4 of 25

Test Method

A. Screening limits for regulated elements according to IEC 62321-3-1:2013 Ed.1.0 (Unit: mg/kg)

Element Polymers		Metals	Composite material	
Pb	$BL \leq (700-3\sigma) < X$ $< (1300+3\sigma) \leq OL$	BL≤(700-3σ) <x <(1300+3σ)≤OL</x 	BL\(\leq (500-3\sigma) \leq X \(< (1500+3\sigma)\) \(\leq OL\)	
Cd	$BL \leq (70-3\sigma) < X < (130+3\sigma)$ $\leq OL$	BL≤(70-3σ) <x <(130+3σ)<br="">≤OL</x>	LOD <x<(150+3σ) td="" ≤ol<=""></x<(150+3σ)>	
Hg	BL≤(700-3σ) <x <(1300+3σ)<br="">≤OL</x>	BL≤(700-3σ) <x <(1300+3σ)<br="">≤OL</x>	$BL \leq (500-3\sigma) < X < (1500+3\sigma)$ $\leq OL$	
Cr	BL≤(700-3σ)< X	BL≤(700-3σ)< X	BL≤(500-3σ)< X	
Br	BL \leq (300-3 σ) $<$ X	N/A	BL≤(250-3σ)< X	

B. Chemical Test

Tested Item(s)	Test Method	Measured Equipment(s)	MDL	Limit
Load (Db)	IEC 62321-5:2013 Ed.1.0	ICP-OES	10 mg/kg	1000 mg/kg
Lead (Pb)	Refer to IEC 62321-5:2013 Ed.1.0	ICP-OES	10 mg/kg	1000 mg/kg
Codminus (Cd)	IEC 62321-5:2013 Ed.1.0	ICP-OES	10 mg/kg	100 m a/ls a
Cadmium (Cd)	Refer to IEC 62321-5:2013 Ed.1.0	ICP-OES	10 mg/kg	100 mg/kg
Managery (Ha)	IEC 62321-4:2013 Ed.1.0	ICP-OES	10 mg/kg	1000 m a/ls a
Mercury (Hg)	Refer to IEC 62321-4:2013 Ed.1.0	ICP-OES	10 mg/kg	1000 mg/kg
II	IEC 62321:2008 Ed.1 Annex C	UV-Vis	10 mg/kg	
Hexavalent Chromium (Cr(VI))	IEC 62321-7-1:2015	UV-Vis	0.10μg/cm ² (LOQ)	1000 mg/kg
Polybrominated Biphenyls (PBBs)	IEC 62321-6:2015	GC-MS	100 mg/kg	1000 mg/kg
Polybrominated Diphenyl Ethers (PBDEs)	IEC 62321-6:2015	GC-MS	100 mg/kg	1000 mg/kg

Remark:

- BL = Under the screening limit
- OL = Above the screening limit
- X = The range of needing to do further testing
- 3σ = The reproducibility of analytical instruments
- N/A= Not applicable
- LOD = Detection limit
- LOQ = Limit of Quantification, The LOQ of Hexavalent chromium is 0.10 μg/cm²







Report No. SCL01I106198

Page 5 of 25

Test Result(s)

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
/	6	Pb	BL	/		(6)
	White label	Cd	BL	/		
1	with black	Hg	BL	/	PASS	Nov. 23, 2016
	printing	Cr(Cr(VI))	BL			
	(C)	Br(PBBs&PBDEs)	BL	W/		(0,
		Pb	BL	/		
		Cd	BL	/		
2	Silvery metal	Hg	BL	/	PASS	Nov. 23, 2016
	(6)	Cr(Cr(VI))	BL	/	(67)	(6)
		Br(PBBs&PBDEs)	N/A	/		
		Pb	BL	/		
	-0-	Cd	BL	J-0/		~ * *
3	Silvery metal	Hg	BL		PASS	Nov. 23, 2016
	C	Cr(Cr(VI))	BL			
		Br(PBBs&PBDEs)	N/A	/		
		Pb	BL	/		
	(2	Cd	BL	/		
4	Silvery metal	Hg	BL	/	PASS	Nov. 23, 2016
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		
	C.	Pb	BL	/ 1		Con .
		Cd	BL			(62)
5	Black plastic	Hg	BL	1	PASS	Nov. 23, 2016
		Cr(Cr(VI))	BL	/		
	_0	Br(PBBs&PBDEs)	IN	N.D.	-0-	-0-
7)	(3	Pb	BL	/		(3)
	0.1	Cd	BL	/		6
6	Silvery/golden	Hg	BL	/	PASS	Nov. 23, 2016
	metal	Cr(Cr(VI))	BL	/	1	52-5
		Br(PBBs&PBDEs)	N/A		1	















Report No. SCL01I106198 Page 6 of 25

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
·)	(2)	Pb	BL	/	(27)	(2)
/	0	Cd	BL	/		(0)
7	Black plastic	Hg	BL	/	PASS	Nov. 23, 2016
	-0-	Cr(Cr(VI))	BL	/		-0-
/		Br(PBBs&PBDEs)	IN	N.D.		
1		Pb	BL	1		0
		Cd	BL	/		
8	Golden metal	Hg	BL	/	PASS	Nov. 23, 2016
	()	Cr(Cr(VI))	BL	/		(3)
	(6)	Br(PBBs&PBDEs)	N/A	/	(67)	(6)
		Pb	BL	/		
		Cd	BL	/		
9	Black plastic	Hg	BL	-0/	PASS	Nov. 23, 2016
		Cr(Cr(VI))	BL			
1		Br(PBBs&PBDEs)	IN	N.D.		
		Pb	BL	/		
		Cd	BL	/		Nov. 23, 2016
10	Silvery metal	Hg	BL	/	PASS	
	(C)	Cr(Cr(VI))	BL	/	(0,)	
		Br(PBBs&PBDEs)	N/A	/		
		Pb	BL	/		
		Cd	BL	/°7		Cin
11	Beige-white	Hg	BL	(6)	PASS	Nov. 23, 2016
100	plastic	Cr(Cr(VI))	BL			
		Br(PBBs&PBDEs)	IN	N.D.		
	_0	Pb	BL	/	/°>	-05
. (4.	(4	Cd	BL	/	PASS	
12	Silvery metal	Hg	BL	/		Nov. 23, 2016
		Cr(Cr(VI))	BL	/	1	
		Br(PBBs&PBDEs)	N/A	/	1	







Report No. SCL01I106198 Page 7 of 25

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
~)	(2)	Pb	BL	/	(27)	(2)
	0	Cd	BL	/		(0)
13	Silvery metal	Hg	BL	/	PASS	Nov. 23, 2016
	-0-	Cr(Cr(VI))	BL	/		-0-
/		Br(PBBs&PBDEs)	N/A			
1		Pb	BL	1		0
	PCB	Cd	BL	/		
14	(Tested as a	Hg	BL	/	PASS	Nov. 23, 2016
	whole)	Cr(Cr(VI))	BL	/		(3)
	(6)	Br(PBBs&PBDEs)	IN	N.D.	(67)	(6)
		Pb	BL	/		
		Cd	BL	/	PASS	Nov. 23, 2016
15	Silvery metal	Hg	BL	/		
		Cr(Cr(VI))	BL			
		Br(PBBs&PBDEs)	N/A			
		Pb	BL	/		
	Beige plastic	Cd	BL	/		Nov. 23, 2016
16	with brown	Hg	BL	/	PASS	
	printing	Cr(Cr(VI))	BL	/	(0,)	
		Br(PBBs&PBDEs)	BL	/		
		Pb	BL	/		
		Cd	BL	/°7	1	Cin
17	Black glue	Hg	BL	(6)	PASS	Nov. 23, 2016
		Cr(Cr(VI))	BL		1	
		Br(PBBs&PBDEs)	BL	/		
	_0	Pb	BL	/	/°>	-05
	D (A	Cd	BL	/	PASS	
18	Deep gray	Hg	BL	/		Nov. 23, 2016
	magnet	Cr(Cr(VI))	BL	/	1	
		Br(PBBs&PBDEs)	N/A	/	1	







Report No. SCL01I106198 Page 8 of 25

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
	0	Pb	BL	/		
	Cupreous	Cd	BL	/		
19	enamelled wire	Hg	BL	/	PASS	Nov. 23, 2016
	enamened wife	Cr(Cr(VI))	BL	/		6)
	6.	Br(PBBs&PBDEs)	BL	/ /	(6)	/
		Pb	BL	/		
		Cd	BL	/		
20	Red enamelled	Hg	BL	1/2	PASS	Nov. 23, 2016
	wire	Cr(Cr(VI))	BL	/ (6)	67)	(67)
		Br(PBBs&PBDEs)	BL	/		
		Pb	BL	/		
	-0-	Cd	BL	/	717	
21	Silvery metal	Hg	BL	/	PASS	Nov. 23, 2016
		Cr(Cr(VI))	BL	1	6	
		Br(PBBs&PBDEs)	N/A	/		
		Pb	BL	/		
	Black audion	Cd	BL	1/2	9	
22	(Tested as a	Hg	BL	/ 🐷	PASS	Nov. 23, 2016
	whole)	Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
		Pb	$1.5 \times 10^3 \text{ mg/kg}^{\#1}$	/	73	N.
	Black	Cd	BL	/	(6)	°)
23	resistance	Hg	BL	/	PASS	Nov. 23, 2016
	(Tested as a	Cr(Cr(VI))	BL	/		
	whole)	Br(PBBs&PBDEs)	BL	/		-0-
9)		Pb	BL	/ (4		(20)
	Brown	Cd	BL	/		
24	capacitance	Hg	BL	/	PASS	Nov. 23, 2016
	(Tested as a	Cr(Cr(VI))	BL	/		
	whole)	Br(PBBs&PBDEs)	BL	/	(3	















Report No. SCL01I106198 Page 9 of 25

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
~)	(2)	Pb	BL	/	(27)	(2)
	PCB	Cd	BL	/		(0)
25	(Tested as a	Hg	BL	/	PASS	Nov. 23, 2016
	whole)	Cr(Cr(VI))	BL	/		-05
	(1)	Br(PBBs&PBDEs)	IN	N.D.]	
1	0)	Pb	BL	WI		0
		Cd	BL	/	1	
26	Silvery metal	Hg	BL	/	PASS	Nov. 23, 2016
	()	Cr(Cr(VI))	BL	/	C.	(3)
	(6)	Br(PBBs&PBDEs)	N/A	/	(67)	(6)
		Pb	BL	/		
	IC	Cd	BL	/		
27	(Tested as a	Hg	BL	-0/	PASS	Nov. 23, 2016
	whole)	Cr(Cr(VI))	BL			
		Br(PBBs&PBDEs)	BL		_	
		Pb	BL	/		
	Black body	Cd	BL	/		Nov. 23, 2016
28	(Tested as a	Hg	BL	/	PASS	
	whole)	Cr(Cr(VI))	BL	/	(0,)	
		Br(PBBs&PBDEs)	IN	N.D.		
		Pb	BL	/		
		Cd	BL	/°7		Cin .
29	Silvery metal	Hg	BL		PASS	Nov. 23, 2016
		Cr(Cr(VI))	BL			
		Br(PBBs&PBDEs)	N/A	/	1	
	_0	Pb	BL	/	705	_0-
	Black body	Cd	BL	/	PASS	
30	(Tested as a	Hg	BL	/		Nov. 23, 2016
	whole)	Cr(Cr(VI))	BL	/	1	
		Br(PBBs&PBDEs)	BL	/	1	







Report No. SCL01I106198 Page 10 of 25

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
	(63	Pb	BL	/	(2)	(6.5)
	0	Cd	BL	/		
31	Silvery metal	Hg	BL	/	PASS	Nov. 23, 2016
	-07	Cr(Cr(VI))	BL	/		40%
	(1)	Br(PBBs&PBDEs)	N/A			
/		Pb	BL	1		
	Black body	Cd	BL	/		
32	(Tested as a	Hg	BL	/	PASS	Nov. 23, 2016
	whole)	Cr(Cr(VI))	BL	/	Ci	700
	(6)	Br(PBBs&PBDEs)	BL	/	(0,)	(67)
		Pb	BL	/		
		Cd	BL	/		
33	Silvery metal	Hg	BL	-0/	PASS	Nov. 23, 2016
		Cr(Cr(VI))	BL			
		Br(PBBs&PBDEs)	N/A		_	
		Pb	BL	/		
	Black body	Cd	BL	/	PASS	Nov. 23, 2016
34	(Tested as a	Hg	BL	/		
	whole)	Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/		
		Pb	BL	/		
		Cd	BL	/°7		Cin .
35	Silvery metal	Hg	BL		PASS	Nov. 23, 2016
		Cr(Cr(VI))	BL			
		Br(PBBs&PBDEs)	N/A	/		
	_0	Pb	BL	/		_0.
36		Cd	BL	/	PASS	(2)
	Deep gray magnet	Hg	BL	/		Nov. 23, 2016
		Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	N/A	/		







Report No. SCL01I106198 Page 11 of 25

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
2)	(65	Pb	BL	/	(27)	(65)
		Cd	BL	/		(0)
37	Cupreous	Hg	BL	/	PASS	Nov. 23, 2016
	enamelled wire	Cr(Cr(VI))	BL	/		40%
		Br(PBBs&PBDEs)	BL			
/	97 ₂₁	Pb	BL	W 1		0
	Black	Cd	BL	/		
38	resistance	Hg	BL	/	PASS	Nov. 23, 2016
	(Tested as a	Cr(Cr(VI))	IN	N.D.		(%)
	whole)	Br(PBBs&PBDEs)	BL	/	(0)	(67)
		Pb	BL	/		
	Gray	Cd	BL	/	PASS	
39	capacitance	Hg	BL	/		Nov. 23, 2016
	(Tested as a	Cr(Cr(VI))	BL			
	whole)	Br(PBBs&PBDEs)	BL			
	-	Pb	BL	/		
	Brown	Cd	BL	/		Nov. 23, 2016
40	capacitance	Hg	BL	/	PASS	
	(Tested as a	Cr(Cr(VI))	BL	/	(0,)	6,
	whole)	Br(PBBs&PBDEs)	BL	/		
		Pb	BL	/		
	Light brown	Cd	BL	/°7		Cin
41 capacitance (Tested as a whole)	(C. V. 1)	Hg	BL	(6)	PASS	Nov. 23, 2016
	*	Cr(Cr(VI))	BL			
	Br(PBBs&PBDEs)	BL	/			
		Pb	BL	/	/°>	-07
Gray-white capacitance (Tested as a	Cd	BL	/		(25)	
	-	Hg	BL	/	PASS	Nov. 23, 2016
	•	Cr(Cr(VI))	BL	/	1	
	whole)	Br(PBBs&PBDEs)	BL	/	1	







Report No. SCL01I106198 Page 12 of 25

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
(a)		Pb	BL	/	(27)	(65)
	Crystal	Cd	BL	/		(0)
43	oscillator (Tastad as a	Hg	BL	/	PASS	Nov. 23, 2016
	(Tested as a whole)	Cr(Cr(VI))	IN	N.D.		-0-
/	whole)	Br(PBBs&PBDEs)	BL			
1		Pb	BL	1		
	Black diode	Cd	BL	/		
44	(Tested as a	Hg	BL	/	PASS	Nov. 23, 2016
	whole)	Cr(Cr(VI))	BL	/		(3)
	(6)	Br(PBBs&PBDEs)	BL	/	(67)	(6)
		Pb	BL	/		
	LED	Cd	BL	/]	
45	(Tested as a	Hg	BL	/	PASS	Nov. 23, 2016
	whole)	Cr(Cr(VI))	BL			
		Br(PBBs&PBDEs)	BL			
		Pb	BL	/		
	Brown-yellow	Cd	BL	/		Nov. 23, 2016
46	capacitance	Hg	BL	/	PASS	
	(Tested as a	Cr(Cr(VI))	BL	/	(0,)	
	whole)	Br(PBBs&PBDEs)	BL	/		
		Pb	BL	/		
	Black audion	Cd	BL	/ 7		Cir.
47	(Tested as a	Hg	BL	(3)	PASS	Nov. 23, 2016
whole)	whole)	Cr(Cr(VI))	BL			
		Br(PBBs&PBDEs)	BL	/		
	_0	Pb	BL	/	/°>	-07
	IC	Cd	BL	/		(65)
48	(Tested as a	Hg	BL	/	PASS	Nov. 23, 2016
	whole)	Cr(Cr(VI))	BL	/		
	2.00	Br(PBBs&PBDEs)	BL	/	1	







Report No. SCL01I106198 Page 13 of 25

Sample No.	Sample Description	Tested Items	XRF Screening Test	Chemical Test (mg/kg)	Conclusion	Sample Received/ Resubmitted Date
·2)	(%	Pb	BL	/	(~7")	(6.5)
	Daine salaite	Cd	BL	/		
49	Beige-white	Hg	BL	/	PASS	Nov. 23, 2016
	plastic	Cr(Cr(VI))	BL			-0-
		Br(PBBs&PBDEs)	BL			
1		Pb	BL	W/		0
		Cd	BL	/		
50	Silvery metal	Hg	BL	/	PASS	Nov. 23, 2016
	0	Cr(Cr(VI))	BL	/		(3)
	(6)	Br(PBBs&PBDEs)	N/A	/	(6,2)	(6)
		Pb	BL	/		
	White plastic	Cd	BL	/]	
51	with black	Hg	BL	/	PASS	Nov. 23, 2016
	printing	Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL			
		Pb	BL	/		
		Cd	BL	/		
52	Silvery metal	Hg	BL	/	PASS	Nov. 23, 2016
	(C)	Cr(Cr(VI))	BL	/	(6,)	
		Br(PBBs&PBDEs)	N/A	/		
		Pb	BL	/		
	Black plastic	Cd	BL	/ 1]	Cin
53	with white	Hg	BL	(6)	PASS	Nov. 23, 2016
pri	printing	Cr(Cr(VI))	BL	/]	
		Br(PBBs&PBDEs)	BL	/		
	_0	Pb	BL	/		-0-
	Blue plastic	Cd	BL	/	PASS	(2)
54	with white	Hg	BL	/		Nov. 23, 2016
	printing	Cr(Cr(VI))	BL	/		
		Br(PBBs&PBDEs)	BL	/	1	





Report No. SCL01I106198

Page 14 of 25


Remark:

- N.D. = Not Detected (<MDL)
- MDL = Method Detection Limit
- mg/kg = ppm = parts per million
- /=Not tested
- IN= Uncertain, Further chemical test
- N/A= Not applicable
- BL = Under the screening limit
- When conducting the test for PBBs&PBDEs, XRF was introduced to screen Br Exclusively; When conducting the test for Hexavalent Chromium, XRF was introduced to screen Chromium exclusively.
- **According to the client's statement, the material of the sample(s) fall into exemption items 7(c)-I according to EU Directive 2011/65/EU: Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound.
- According to the client's statement, reference information see the following table:

Sample No.	Reference Report No.	Sample No. in Reference Report
7	SCL01I08087705	55

Test Process

- 1. Lead (Pb), Cadmium (Cd)
- 1) IEC 62321-5:2013 Ed.1.0

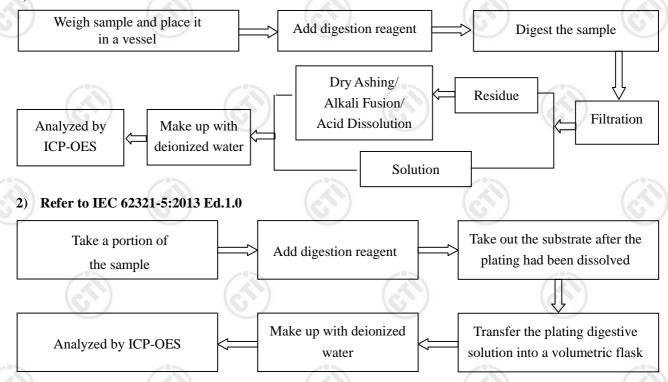






SCL01I106198 Report No. Page 15 of 25 2. Mercury (Hg) 1) IEC 62321-4:2013 Ed.1.0 Digest sample in microwave Weigh sample and place it in a Add digestion reagent microwave digestion vessel digestion oven Alkali Fusion/ Residue Filtration Acid Dissolution Make up with Analyzed by **ICP-OES** deionized water Solution 2) Refer to IEC 62321-4:2013 Ed.1.0 Take out the substrate after the Take a portion of Add digestion reagent plating had been dissolved the sample Make up with deionized Transfer the plating digestive Analyzed by ICP-OES water solution into a volumetric flask 3. Hexavalent Chromium (Cr(VI)) Non-metal sample(s) Weigh sample and place Heat at 90-95°C for 3 hours Add digestion solution it in a conical flask Adjust the pH value Cool and filter Add test solution of the solution Adjust the pH value Make up with Analyzed by UV-Vis of the solution deionized water



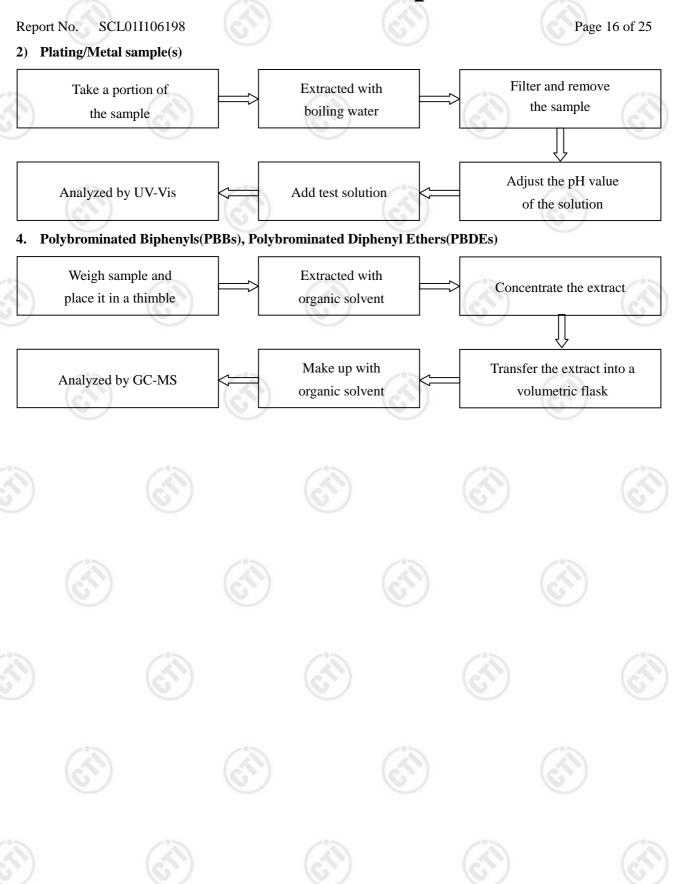





Report No. SCL01I106198


Page 17 of 25


Photo(s) of the tested component(s)

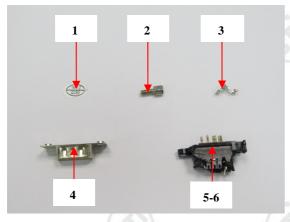




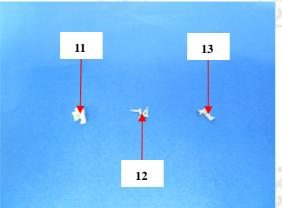

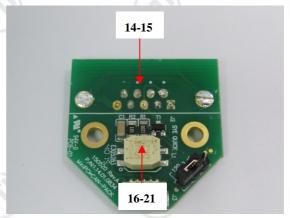

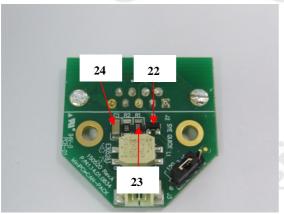

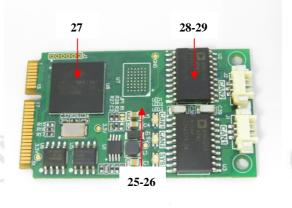















Report No. SCL01I106198

Page 18 of 25

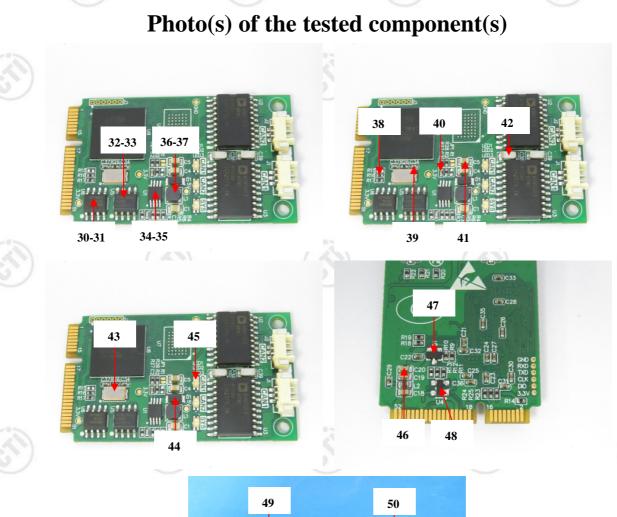

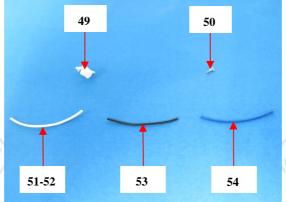















Report No. SCL01I106198 Page 19 of 25

Exempted Items of RoHS Directive

In accordance with Directive 2011/65/EU as amended , there are 41 exemption items in Annex III of

2011/65/EU altogether.

.011/03/E	U altogether.	
1	Exemption	Scope and dates of applicability
1	Mercury in single capped (compact) fluorescent lamps not exceeding (per burner):	
1(a)	For general lighting purposes < 30 W: 5 mg	Expires on 31 December 2011; 3,5 mg may be used per burner after 31 December 2011 until 31 December 2012; 2,5 mg shall be used per burner after 31 December 2012.
1(b)	For general lighting purposes ≥ 30 W and < 50 W: 5 mg	Expires on 31 December 2011; 3,5 mg may be used per burner after 31 December 2011.
1(c)	For general lighting purposes ≥ 50 W and < 150 W: 5 mg	
1(d)	For general lighting purposes ≥ 150 W: 15 mg	
1(e)	For general lighting purposes with circular or square structural shape and tube diameter ≤17 mm	No limitation of use until 31 December 2011; mg may be used per burner after 31 December 2011.
1(f)	For special purposes: 5 mg	
1(g)	For general lighting purposes < 30 W with a lifetime equal or above 20 000 h: 3,5 mg	Expires on 31 December 2017.
2(a)	Mercury in double-capped linear fluorescent lamps for general lighting purposes not exceeding (per lamp):	(cfl)
2(a)(1)	Tri-band phosphor with normal lifetime and a tube diameter < 9 mm (e.g. T2): 5 mg	Expires on 31 December 2011; 4 mg may be used per lamp after 31 December 2011.
2(a)(2)	Tri-band phosphor with normal lifetime and a tube diameter ≥ 9 mm and ≤ 17 mm (e.g. T5): 5 mg	Expires on 31 December 2011; 3 mg may be used per lamp after 31 December 2011.
2(a)(3)	Tri-band phosphor with normal lifetime and a tube diameter > 17 mm and ≤ 28 mm (e.g. T8): 5 mg	Expires on 31 December 2011; 3,5 mg may be used per lamp after 31 December 2011.
2(a)(4)	Tri-band phosphor with normal lifetime and a tube diameter > 28 mm (e.g. T12): 5 mg	Expires on 31 December 2012; 3,5 mg may be used per lamp after 31 December 2012.
2(a)(5)	Tri-band phosphor with long lifetime (≥ 25 000 h): 8 mg	Expires on 31 December 2011; 5 mg may be used per lamp after 31 December 2011.
2(b)	Mercury in other fluorescent lamps not exceeding (per lamp):	(4)
2(b)(1)	Linear halophosphate lamps with tube > 28 mm (e.g. T10 and T12): 10 mg	Expires on 13 April 2012.
2(b)(2)	Non-linear halophosphate lamps (all diameters): 15 mg	Expires on 13 April 2016.



Report No. SCL01I106198 Page 20 of 25

2(b)(3)	Non-linear tri-band phosphor lamps with tube diameter > 17 mm (e.g. T9)	No limitation of use until 31 December 2011; 15 mg may be used per lamp after 31 December 2011.
2(b)(4)	Lamps for other general lighting and special purposes (e.g. induction lamps).	No limitation of use until 31 December 2011; 15 mg may be used per lamp after 31 December 2011.
3	Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes not exceeding (per lamp):	(ci)
3(a)	Short length (≤500 mm)	No limitation of use until 31 December 2011; 3,5 mg may be used per lamp after 31 December 2011.
3(b)	Medium length (> 500 mm and ≤ 1 500 mm)	No limitation of use until 31 December 2011; 5 mg may be used per lamp after 31 December 2011.
3(c)	Long length (> 1500 mm)	No limitation of use until 31 December 2011; 13 mg may be used per lamp after 31 December 2011.
4(a)	Mercury in other low pressure discharge lamps (per lamp).	No limitation of use until 31 December 2011; 15 mg may be used per lamp after 31 December 2011.
4(b)	Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved colour rendering index Ra > 60:	
4(b)-I	P ≤ 155 W	No limitation of use until 31 December 2011; 30 mg may be used per burner after 31 December 2011.
4(b)-II	155 W < P≤405 W	No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011.
4(b)-III	P > 405 W	No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011.
4(c)	Mercury in other High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner):	
4(c)-I	P ≤ 155 W	No limitation of use until 31 December 2011; 25 mg may be used per burner after 31 December 2011.
4(c)-II	155 W < P ≤ 405 W	No limitation of use until 31 December 2011; 30 mg may be used per burner after 31



Report No. SCL01I106198 Page 21 of 25

		December 2011.	
4(c)-III	P > 405 W	No limitation of use until 31 December 2011; 40 mg may be used per burner after 31 December 2011.	
4(d)	Mercury in High Pressure Mercury (vapour) lamps (HPMV).	Expires on 13 April 2015.	
4(e)	Mercury in metal halide lamps (MH)		
4(f)	Mercury in other discharge lamps for special purposes not specifically mentioned in this Annex.		
4(g)	Mercury in hand crafted luminous discharge tubes used for signs, decorative or architectural and specialist lighting and light-artwork, where the mercury content shall be limited as follows:	Expires on 31 December 2018.	
	(a) 20 mg per electrode pair + 0,3 mg per tube length in cm ,but not more than 80 mg, for outdoor applications and indoor applications exposed to temperatures below 20°C;	(ci)	
	(b) 15 mg per electrode pair + 0,24 mg per tube length in cm, but not more than 80 mg, for all other indoor applications.		
5(a)	Lead in glass of cathode ray tubes.	(25)	
5(b)	Lead in glass of fluorescent tubes not exceeding 0,2 % by weight.		
6(a)	Lead as an alloying element in steel for machining purposes and in galvanized steel containing up to 0,35 % lead by weight.		
6(b)	Lead as an alloying element in aluminium containing up to 0,4 % lead by weight.		
6(c)	Copper alloy containing up to 4% lead by weight.	C'S	
7(a)	Lead in high melting temperature type solders (i.e. lead- based alloys containing 85 % by weight or more lead).		
7(b)	Lead in solders for servers, storage and storage array systems, network infrastructure equipment for switching, signalling, transmission, and network management for telecommunications.		
7(c)-I	Electrical and electronic components containing lead in a glass or ceramic other than		



Report No. SCL01I106198 Page 22 of 25

•		
	dielectric ceramic in capacitors, e.g.	
	piezoelectronic devices, or in a glass or	
	ceramic matrix compound.	442
7(c)-II	Lead in dielectric ceramic in capacitors for a	
/(c)-II		(65)
	rated voltage of 125 V AC or 250 V DC or	
	higher.	
7(c)-III	Lead in dielectric ceramic in capacitors for a	Expires on 1 January 2013 and after that date
	rated voltage of less than 125 V AC or 250 V	may be used in spare parts for EEE placed on
(DC.	the market before 1 January 2013.
7(c)-IV	Lead in PZT based dielectric ceramic materials	
	for capacitors being part of integrated circuits	
	or discrete semiconductors.	
8(a)	Cadmium and its compounds in one shot pellet	Expires on 1 January 2012 and after that date
	type thermal cut-offs.	may be used in spare parts for EEE placed on
	type morniar eac orisi	the market before 1 January 2012.
8(b)	Cadmium and its compounds in electrical	the market before 1 sandary 2012.
0(0)	contacts.	
0		
9	Hexavalent chromium as an anticorrosion	
	agent of the carbon steel cooling system in	
	absorption refrigerators up to 0,75 % by	
	weight in the cooling solution.	
9(b)	Lead in bearing shells and bushes for	
	refrigerant-containing compressors for heating,	· ·
	ventilation, air conditioning and refrigeration	
	(HVACR) applications.	
11(a)	Lead used in C-press compliant pin connector	May be used in spare parts for EEE placed on
	systems.	the market before 24 September 2010.
11(b)	Lead used in other than C-press compliant pin	Expires on 1 January 2013 and after that date
- 1	connector systems.	may be used in spare parts for EEE placed on
		the market before 1 January 2013.
12	Lead as a coating material for the thermal	May be used in spare parts for EEE placed on
12	conduction module C-ring.	the market before 24 September 2010.
13(a)	Lead in white glasses used for optical	the market before 24 september 2010.
13(a)	/ 201	
12(1-)	applications.	(6,2)
13(b)	Cadmium and lead in filter glasses and glasses	
	used for reflectance standards.	
14	Lead in solders consisting of more than two	Expires on 1 January 2011 and after that date
	elements for the connection between the pins	may be used in spare parts for EEE placed on
	and the package of microprocessors with a lead	the market before 1 January 2011.
	content of more than 80 % and less than 85 %	
	by weight.	
15	Lead in solders to complete a viable electrical	
	connection between semiconductor die and	/ '>
10		(AN)



Report No. SCL01I106198 Page 23 of 25

• 0			
	carrier within integrated circuit flip chip packages.		
16	Lead in linear incandescent lamps with silicate coated tubes.	Expires on 1 September 2013.	(
17	Lead halide as radiant agent in high intensity discharge (HID) lamps used for professional reprography applications.		(6
18(a)	Lead as activator in the fluorescent powder (1 % lead by weight or less) of discharge lamps when used as speciality lamps for diazoprinting reprography, lithography, insect traps, photochemical and curing processes containing phosphors such as SMS	Expires on 1 January 2011.	
	$((Sr,Ba)_2MgSi_2O_7:Pb).$		- 6
18(b)	Lead as activator in the fluorescent powder (1 % lead by weight or less) of discharge lamps when used as sun tanning lamps containing phosphors such as BSP (BaSi ₂ O ₅ :Pb).		
19	Lead with PbBiSn-Hg and PbInSn-Hg in specific compositions as main amalgam and with PbSn-Hg as auxiliary amalgam in very compact energy saving lamps (ESL).	Expires on 1 June 2011.	
20	Lead oxide in glass used for bonding front and rear substrates of flat fluorescent lamps used for Liquid Crystal Displays (LCDs).	Expires on 1 June 2011.	(
21	Lead and cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glasses.		
23	Lead in finishes of fine pitch components other than connectors with a pitch of 0, 65 mm and less.	May be used in spare parts for EEE placed on the market before 24 September 2010.	
24	Lead in solders for the soldering to machined through hole discoidal and planar array ceramic multilayer capacitors.	(cin)	6
25	Lead oxide in surface conduction electron emitter displays (SED) used in structural elements, notably in the seal frit and frit ring.	· 5	/°>
26	Lead oxide in the glass envelope of black light blue lamps.	Expires on 1 June 2011.	
27	Lead alloys as solder for transducers used in high-powered (designated to operate for several hours at acoustic power levels of 125	Expired on 24 September 2010	
10	(A) (A)		



Report No. SCL01I106198 Page 24 of 25

	dB SPL and above) loudspeakers.			
29	Lead bound in crystal glass as defined in			
	Annex I (Categories 1, 2, 3 and 4) of Council	_0_		
4)	Directive 69/493/EEC.	(41)		(
30	Cadmium alloys as electrical/mechanical			
	solder joints to electrical conductors located			
	directly on the voice coil in transducers used in			
	high-powered loudspeakers with sound	-0		
	pressure levels of 100 dB (A) and more.		(12)	
31	Lead in soldering materials in mercury free flat			
	fluorescent lamps (which e.g. are used for			
	liquid crystal displays, design or industrial			
_	lighting).	(2)		-
32	Lead oxide in seal frit used for making	(8.73)		
	window assemblies for Argon and Krypton			
22	laser tubes.			
33	Lead in solders for the soldering of thin copper			
	wires of 100 µm diameter and less in power transformers.			
34	Lead in cermet-based trimmer potentiometer	(6)	(6)	
34	elements.			
36	Mercury used as a cathode sputtering inhibitor	Expired on 1 July 2010.		
30	in DC plasma displays with a content up to 30	Expired on 1 sury 2010.		
	mg per display.			
37	Lead in the plating layer of high voltage diodes	(6.)		10
	on the basis of a zinc borate glass body.			
38	Cadmium and cadmium oxide in thick film			
	pastes used on aluminium bonded beryllium	(3)		
	oxide.			
39	Cadmium in colour converting II-VI LEDs (<	Expires on 1 July 2014.		
	10 μg Cd per mm 2 of light-emitting area) for			
	use in solid state illumination or display			
	systems.	/2		1
40	Cadmium in photoresistors for analogue	Expires on 31 December 2013	3.	
	optocouplers applied in professional audio			
	equipment.			



 $Hot line: 400-6788-333 \\ www.cti-cert.com \\ E-mail: info@cti-cert.com \\ Complaint call: 0755-33681700 \\ Complaint E-mail: complaint@cti-cert.com \\ Complaint call: 0755-33681700 \\ Complaint E-mail: complaint@cti-cert.com \\ Complaint call: 0755-33681700 \\ Complaint E-mail: complaint@cti-cert.com \\ Complaint Call: 0755-33681700 \\ Call: 0755-336817$





Report	No. SCL01I106198		Page 25 of 25
41	Lead in solders and termination finishes of	Expires on 31 December 2018.	
	electrical and electronic components and		
	finishes of printed circuit boards used in		
(34)	ignition modules and other electrical and	(41)	
	electronic engine control systems,		(6)
	which for technical reasons must be mounted		
	directly on or in the crankcase or cylinder of		
	hand-held combustion engines (classes SH:1,	-0	-0
	SH:2, SH:3 of Directive 97/68/EC of the		
	European Parliament and of the Council.		

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

